


No. 447

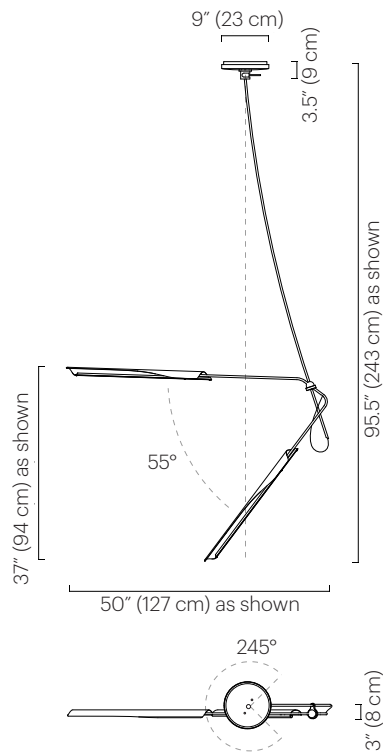

**Description**

The OTTO V features one bent arm with an OTTO shade on each end. The naturally occurring arc of the drop will vary depending on the length. Fixture is balanced by design; arm angles are not adjustable. The OTTO shades contain a dimmable LED source and rotate 300° to cast light directionally. The fixture can rotate 245° from the canopy.

**Materials**

Shade: Powder coated aluminum  
 Ceiling mount: Powder coated and plated aluminum  
 Frame: Plated brass  
 Drop: Plated brass  
 Hardware: Plated and polished brass

**Shade Color**

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)

Custom colors available.

**Finish**

- Brushed Brass
- Polished Nickel

**Lamping**

LED: Warm white 2700K  
 Lumens: 1680 (equivalent to two 60W incandescent bulbs)  
 CRI: 80+  
 50,000 LED life hours (approx.)

**Power Supply**

For 120V areas: 40W 24V phase dimmable class 2 included in canopy.  
 For 220-240V areas: remote power supply only. Not included.

**Dimmer Compatibility**

Dimmable with MLV/TRIAC (leading edge) switch

**Voltage / Wattage**

24V / 22 watts

**Weight**

5 lbs (2.3 kg)

**Remarks**

Specify drop length. Fixed drop not adjustable on site. Arm length is fixed. Not for use on sloped ceilings. Black exterior electrical cord is standard. Hardware finish consistent with frame finish. Ceiling mount consistent with shade color. Additional weight support recommended for junction box installation. Indoor use and dry locations only.

**Dimensions**

3" D x 50" W x 37" H  
 (8 D x 127 W x 94 cm H)  
 Canopy mount: 9" Ø x 3.5" H  
 (23 Ø x 9 cm H)  
 Shade: 1.5" Ø x 28" L  
 (4 Ø x 71 cm L)  
 Minimum overall height: 42.5"  
 (108 cm)

