
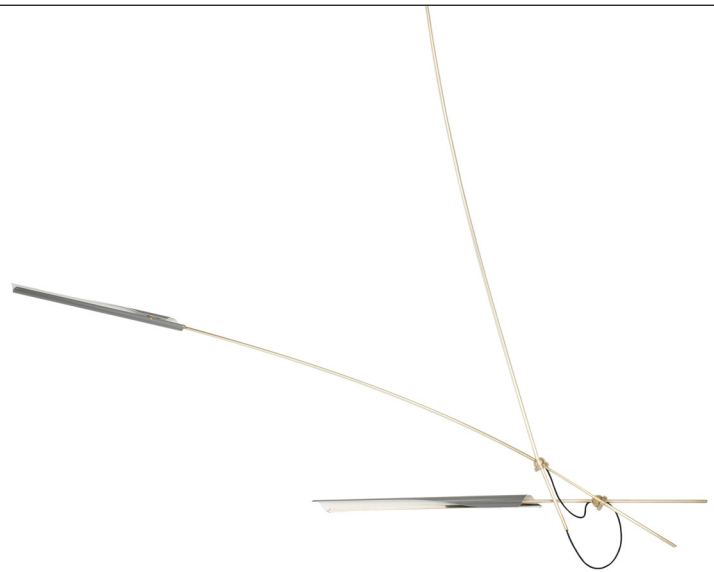


No. 444

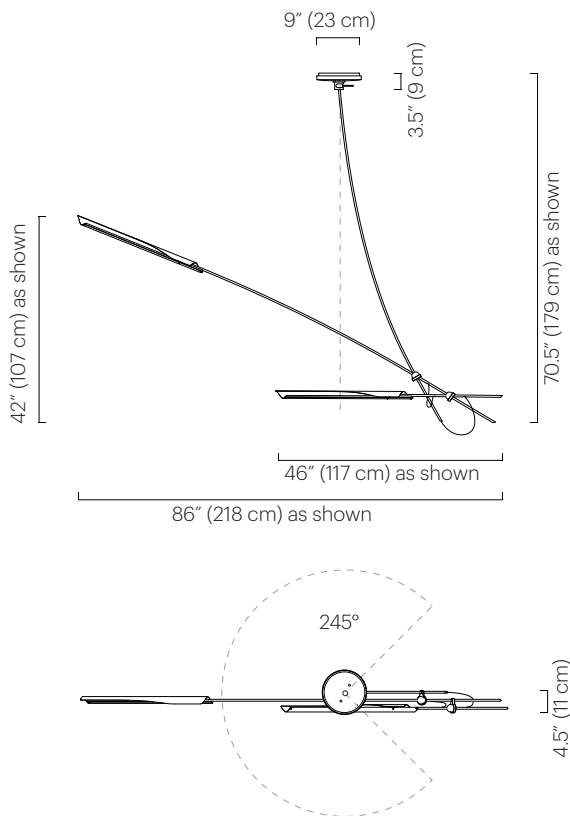

### Description

The OTTO Two Arm features two arms extending from a drop. The naturally occurring arcs of the fixture will vary depending on the length of the drop. The OTTO shade contains a dimmable LED source and rotates 300° to cast light directionally. The fixture can rotate 245° from the canopy.

### Materials

Shade: Powder coated aluminum  
 Ceiling mount: Powder coated and plated aluminum  
 Frame: Plated brass  
 Drop: Plated brass  
 Hardware: Plated and polished brass

### Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

### Finish

- Brushed Brass
- Polished Nickel

Custom finishes available.

### Lamping

LED: Warm white 2700K  
 Lumens: 1680 (equivalent to two 60W incandescent bulbs)  
 CRI: 80+  
 50,000 LED life hours (approx.)

### Power Supply

60W 24V  
 For 120V areas: dimmable Class 2 included in canopy.  
 For 220-240V areas: remote power supply only. Not included.

### Dimmer Compatibility

Dimmable with MLV/TRIAC (leading edge) switch

### Voltage / Wattage

24V / 22 watts

### Weight

5 lbs (2.3 kg)

### Remarks

Specify drop length.  
 Fixed drop not adjustable on site.  
 Arm length is fixed.  
 Not for use on sloped ceilings.  
 Black exterior electrical cord is standard.

### Remarks continued

Hardware finish consistent with frame finish.  
 Ceiling mount consistent with shade color.  
 Additional weight support recommended for junction box installation.  
 Indoor use and dry locations only.

### Dimensions

4.5" D x 86" W x 42" H  
 (11 D x 218 W x 107 cm H)  
 Canopy mount: 9" Ø x 3.5" H  
 (23 Ø x 9 cm H)  
 Shades: 1.5" Ø x 28" L  
 (4 Ø x 71 cm L)  
 Min overall height: 34.5" (88 cm)  
 Max overall height: 132.5" (336.5 cm)